BOUNCE LINES

TYPE:

SUSPENSION

PROJECT NAME:



BOUNCE LINES

DESIGNED BY GLENN MARYS

SPECIFICATION SHEET


tossB®

DIMENSIONS

Bounce Lines is available in two structural sizes with an additional choice of three sizes of LED spheres.


Bounce Lines 120: Length of 120cm (47.24") Sphere S: Diameter of 100mm (3.93") Bounce Lines 180: Length of 180cm (70.86") Sphere M: Diameter of 150mm (5.9") Sphere L: Diameter of 200mm (7.87")

The height (thickness) of the Lines structure is 12mm (0.47")

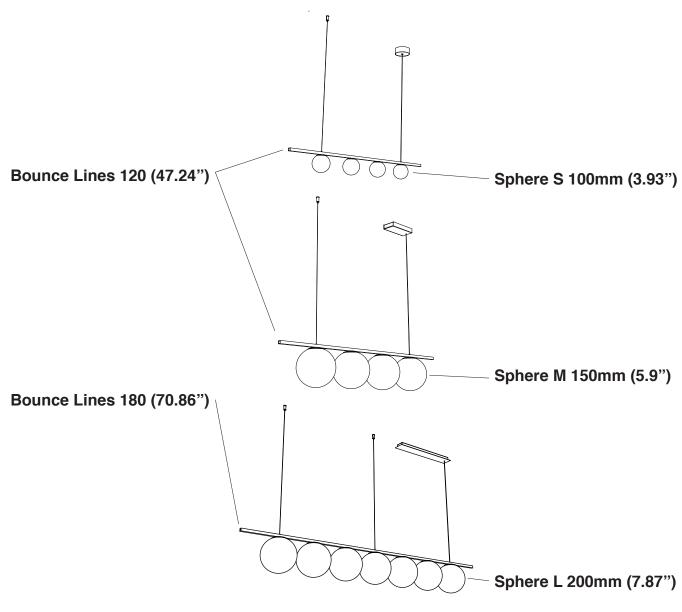


SUSPENSION

BOUNCE LINES 120 -S-




LAMP TYPE	LED
COLOUR TEMP.	2700K
WATTAGE	4x2W
VOLTAGE	22.4V - 350mA

BOUNCE LINES 120 - M-



LAMP TYPE	LED
COLOUR TEMP.	2700K
WATTAGE	4x4W
VOLTAGE	44.4V - 350mA

BOUNCE LINES 120-L-



LAMP TYPE	LED
COLOUR TEMP.	2700K
WATTAGE	4x10W
VOLTAGE	111.2V - 350mA

ORDER CODE

BLACK	L30T111H25DZL
BRONZE	L30T111H25DOE
BRUSHED BRASS	L30T111H25DLB
WHITE	L30T111H25DWL

ORDER CODE

BLACK	L30T111H26DZL
BRONZE	L30T111H26DOE
BRUSHED BRASS	L30T111H26DLB
WHITE	L30T111H26DWL

ORDER CODE

BLACK	L30T111H27DZL
BRONZE	L30T111H27DOE
BRUSHED BRASS	L30T111H27DLB
WHITE	L30T111H27DWL

ORDERING INFO

Model (Order Code)

LED

○2700K

Driver Options

- 120V Phase Dimming
- 120V 0-10V Dimming
- 277V 0-10V Dimming



tossB®

SPECIFICATION SHEET


BOUNCE LINES

TYPE:

PROJECT NAME:


SUSPENSION

BOUNCE LINES 180 -S-




LAMP TYPE	LED
COLOUR TEMP.	2700K
WATTAGE	7x2W
VOLTAGE	39.2V - 350mA

BOUNCE LINES 180 - M-



LAMP TYPE	LED
COLOUR TEMP.	2700K
WATTAGE	7x4W
VOLTAGE	77.7V - 350mA

BOUNCE LINES 180-L-



LAMP TYPE	LED
COLOUR TEMP.	2700K
WATTAGE	7x10W
VOLTAGE	194.6V - 350mA

ORDER CODE

BLACK	L30T111H28DZL
BRONZE	L30T111H28DOE
BRUSHED BRASS	L30T111H28DLB
WHITE	L30T111H28DWL

ORDER CODE

BLACK	L30T111H29DZL
BRONZE	L30T111H29DOE
BRUSHED BRASS	L30T111H29DLB
WHITE	L30T111H29DWL

ORDER CODE

BLACK	L30T111H30DZL
BRONZE	L30T111H30DOE
BRUSHED BRASS	L30T111H30DLB
WHITE	L30T111H30DWL

ORDERING INFO

Model (Order Code)

LED

Driver Options

○2700K

- 120V Phase Dimming
- 120V 0-10V Dimming
- 277V 0-10V Dimming



SHEET

SPECIFICATION

tossB®