


# ROUND CONTROL MINI

CEILING/WALL

TYPE:

PROJECT NAME:

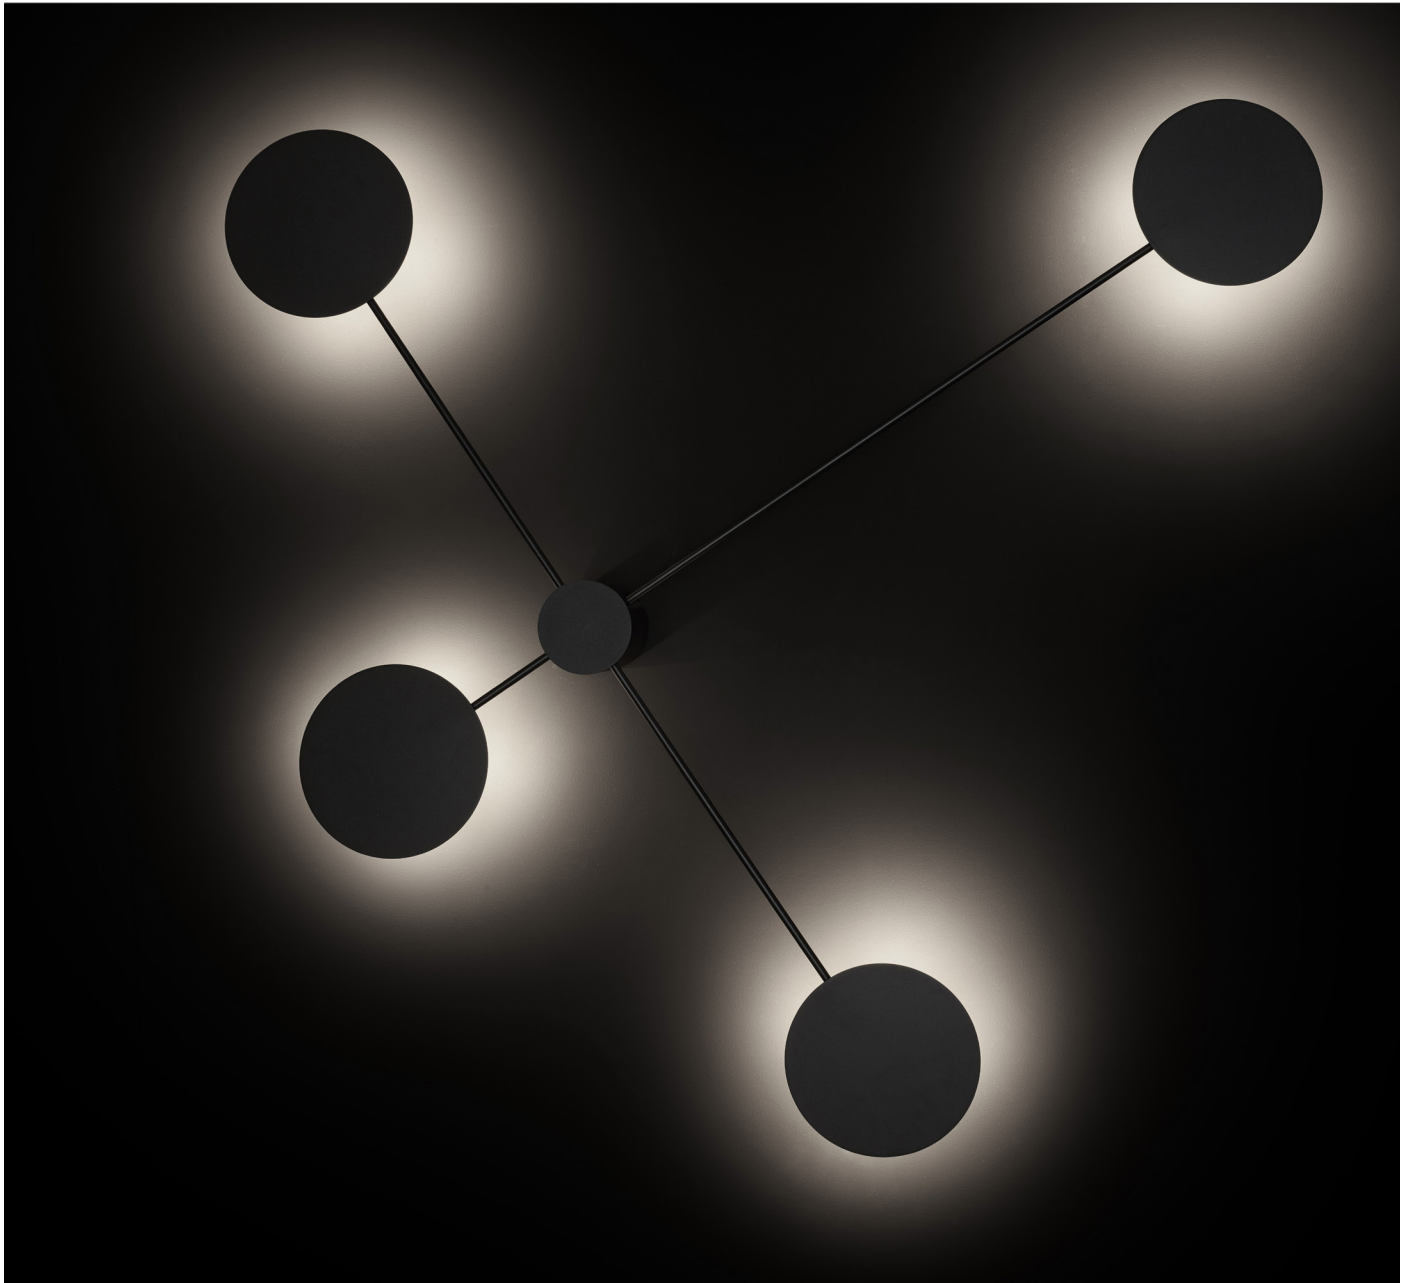

SPECIFICATION SHEET

## round control mini

design by glenn marys

Round control is designed as a ceiling- and wall surface mounted system. During the installation, it can be adapted to any architectural concept due to countless variations in the design. The graphic character of the minimalistic design reveals its functions very honestly. Round control is devised for lighting rooms in commercial areas, board rooms and lounge areas as well as residential rooms. The indirect lighting – with high power LED modules - creates a soft and comfortable atmosphere when dimmed and provides a functional lighting at full power.

**tossB®**

A **Luminart** BRAND

[WWW.TOSSBLIGHTING.COM](http://WWW.TOSSBLIGHTING.COM)


Last updated: 1/21/21

# ROUND CONTROL MINI CC LED TYPE:

## CEILING/WALL

PROJECT NAME:

### round control mini 2/4/6 base



|          |                |
|----------|----------------|
| voltage  | 120V           |
| class    | 1              |
| diameter | 80 mm (3.14")  |
| height   | 100 mm (3.93") |

#### order code base 2-arm

|       |              |
|-------|--------------|
| white | L30T100H4DWL |
| black | L30T100H4DZL |


#### order code base 4-arm

|       |              |
|-------|--------------|
| white | L30T100H5DWL |
| black | L30T100H5DZL |

#### order code base 6-arm

|       |              |
|-------|--------------|
| white | L30T100H6DWL |
| black | L30T100H6DZL |

### round control mini arm 1




Ø130  
(Ø5.11")

|              |                |
|--------------|----------------|
| lamp type    | LED            |
| colour temp. | 2700K          |
| max. watt    | 4W             |
| voltage      | 120V           |
| lumen        | 600            |
| length       | 250 mm (9.84") |
| width        | 130 mm (5.11") |

#### order code

|       |                |
|-------|----------------|
| white | L30T100P7DWLCA |
| black | L30T100P7DZLCA |

### round control mini arm 2




Ø130  
(Ø5.11")

|              |                 |
|--------------|-----------------|
| lamp type    | LED             |
| colour temp. | 2700K           |
| max. watt    | 4W              |
| voltage      | 120V            |
| lumen        | 600             |
| length       | 350 mm (13.77") |
| width        | 130 mm (5.11")  |

#### order code

|       |                |
|-------|----------------|
| white | L30T100P8DWLCA |
| black | L30T100P8DZLCA |

### round control mini arm 3




Ø130  
(Ø5.11")

|              |                 |
|--------------|-----------------|
| lamp type    | LED             |
| colour temp. | 2700K           |
| max. watt    | 4W              |
| voltage      | 120V            |
| lumen        | 600             |
| length       | 450 mm (17.71") |
| width        | 130 mm (5.11")  |

#### order code

|       |                |
|-------|----------------|
| white | L30T100P9DWLCA |
| black | L30T100P9DZLCA |

### round control mini arm 4




Ø130  
(Ø5.11")

|              |                 |
|--------------|-----------------|
| lamp type    | LED             |
| colour temp. | 2700K           |
| max. watt    | 4W              |
| voltage      | 120V            |
| lumen        | 600             |
| length       | 550 mm (21.65") |
| width        | 130 mm (5.11")  |

#### order code

|       |                 |
|-------|-----------------|
| white | L30T100P10DWLCA |
| black | L30T100P10DZLCA |

### round control mini arm 5





Ø130  
(Ø5.11")

|              |                |
|--------------|----------------|
| lamp type    | LED            |
| colour temp. | 2700K          |
| max. watt    | 4W             |
| voltage      | 120V           |
| lumen        | 600            |
| length       | 650 mm (25.6") |
| width        | 130 mm (5.11") |

#### order code

|       |                 |
|-------|-----------------|
| white | L30T100P11DWLCA |
| black | L30T100P11DZLCA |

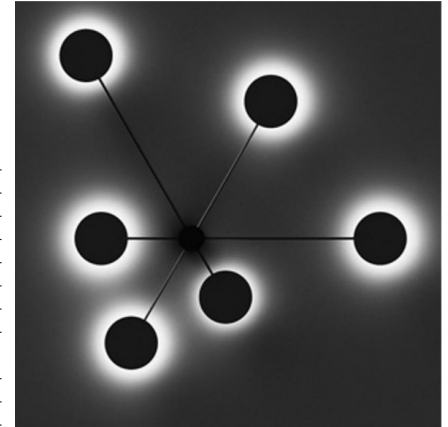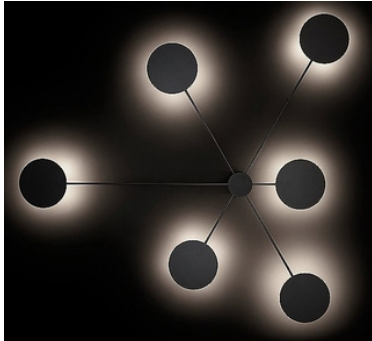

SPECIFICATION SHEET

## ORDERING INFO

Model (Order Code)

Voltage

Dimming

Please note:

277V is only compatible with 0-10V dimming

- 120V  
 277V

- LTE (Leading/Trailing Edge Dim)  
 010V (0-10V)



Installation note: Comes with a 4" backplate that mounts to a standard junction box

**tossB**<sup>®</sup>

WWW.TOSSBLIGHTING.COM

Last updated: 1/21/21

A **Luminart** BRAND

# ROUND CONTROL MINI



CEILING/WALL

TYPE:

PROJECT NAME:


## 2 arms example

round control mini 2

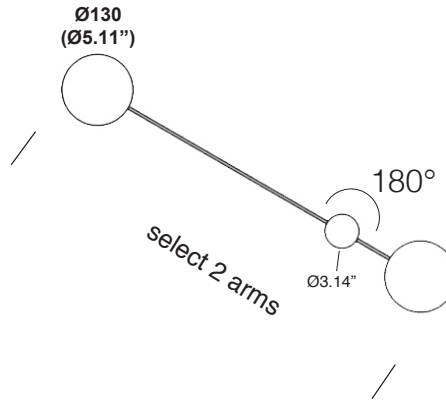



## 4 arms example

round control mini 4

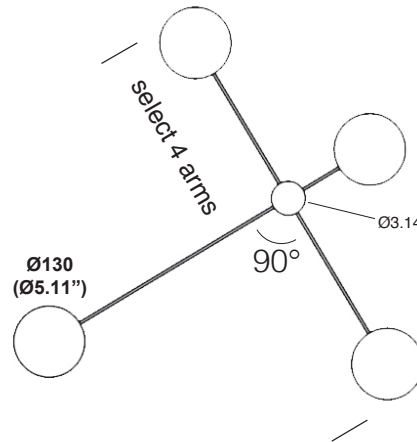

## 6 arms example

round control mini 6

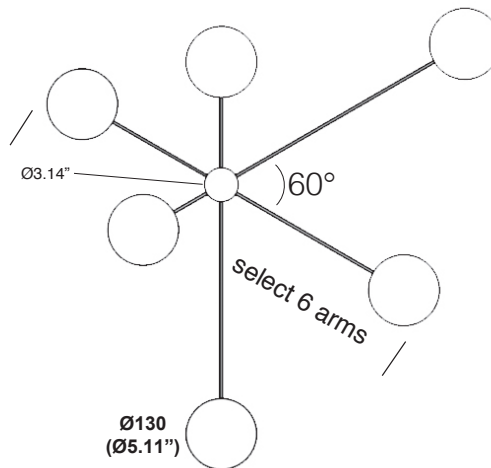

SPECIFICATION SHEET

**tossB**<sup>®</sup>

A **Luminart** BRAND

WWW.TOSSBLIGHTING.COM

Last updated: 1/21/21